



White



Gold



**3 CCT  
CHANGEABLE**

Flip switch to change the CCT

6500K 4000K 3000K



Rose Gold



Coffee

**3 YEARS**  
WARRANTY

Video



**EROS**  
LED DOWNLIGHT

5W

10W

**specification**

PRODUCT NAME :	EROS LED DOWNLIGHT
MODEL NO. :	DL13-3CCT 5W / 10W
SPECIFICATION :	AC200-240V, 50-60Hz ; 5W/10W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
COLOR :	White / Gold / Rose Gold / Coffee
LIGHT SOURCE :	SMD CHIP
LUMEN :	80LM/W
BEAM ANGLE :	110°
PRODUCT SIZE :	100*35mm / 145*40mm
CUT OUT :	80mm / 120mm
IP :	IP20
APPLICATION :	Home, Shop, Hotel... etc
WARRANTY :	3 years
STANDARD :	CE

**Color Temperature:**

**6500-4000K-3000K (3CCT) Changeable**




# 5W

## LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: EROS LED DOWNLIGHT	TYPE: LED	WEIGHT:
SPEC.: 5W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL13-3CCT 5W	Imax (cd)	131.3	S/MH (C0/180)	1.22
NOMINAL POWER (W)	5	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	416.26	η UP, DN (C0-180)	0.0, 50.1
NOMINAL FLUX (lm)	416.264	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220.0	η down (%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

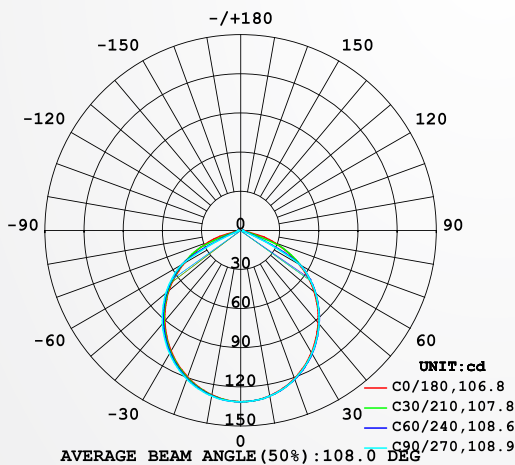

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

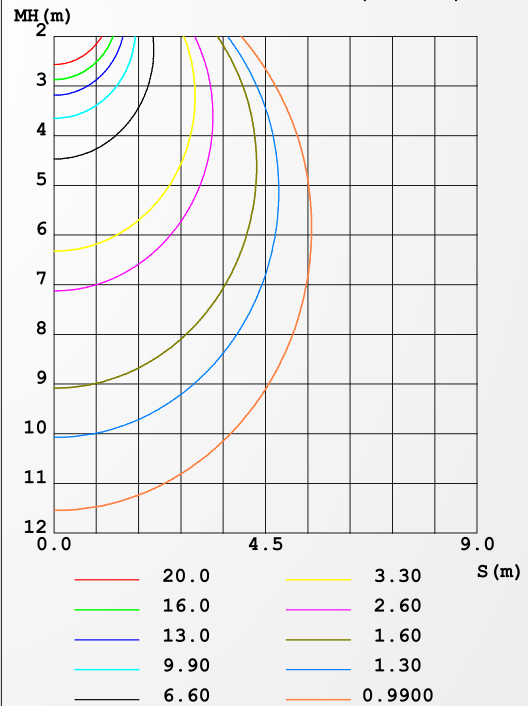

C Range: 0 - 180DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: JACK  
Test Date: 2019-04-26

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 65.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR  
FACEBOOK PAGE +

NEXTLITE PRODUCTS




# 5W

## AAI FIGURE

NAME: EROS LED DOWNLIGHT	TYPE: LED	WEIGHT:
SPEC.: 5W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

Flux out: 252.8 lm

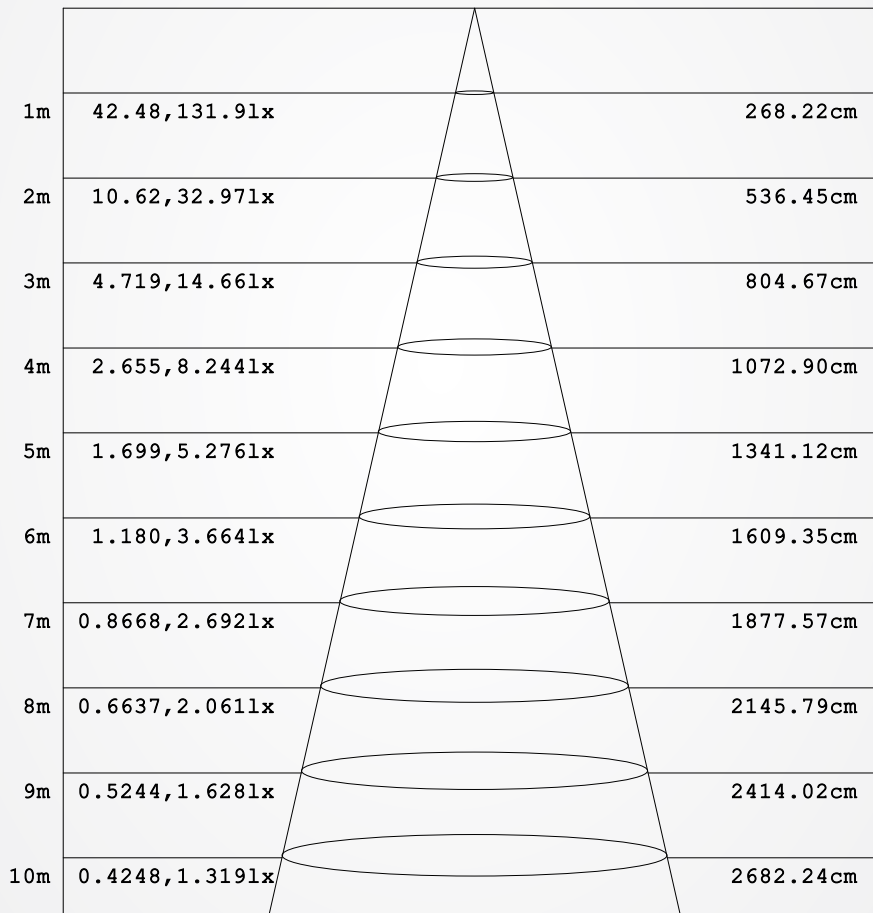

Height                      Eavg, Emax                      Angle: 106.58deg                      Diameter

**Note:** The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: JACK  
Test Date: 2019-04-26

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 65.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR  
FACEBOOK PAGE +

NEXTLITE PRODUCTS





# 10W

## LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: EROS LED DOWNLIGHT	TYPE: LED	WEIGHT:
SPEC.: 10W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL13-3CCT 10W	Imax (cd)	277.3	S/MH (C0/180)	1.23
NOMINAL POWER (W)	10	LOR (%)	1.5	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	740.86	η UP, DN (C0-180)	0.0, 0.7
NOMINAL FLUX (lm)	740,862	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 0.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	219.5	η down (%)	1.4	CIBSE SHR MAX	1.35

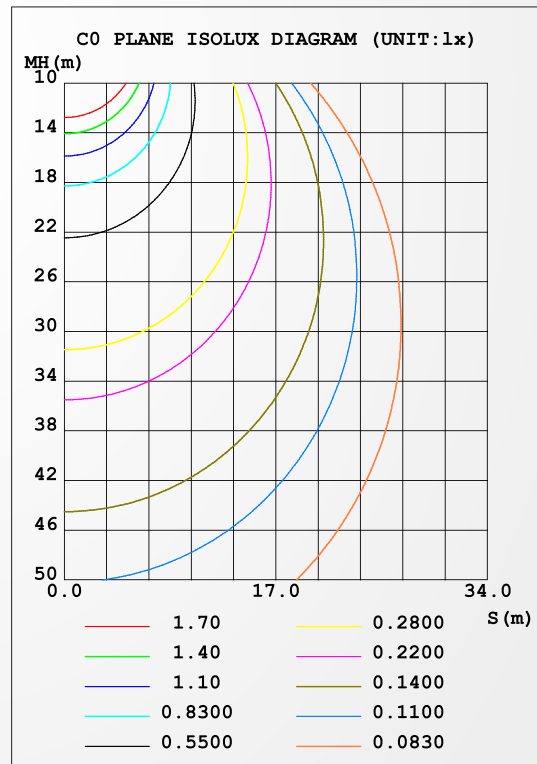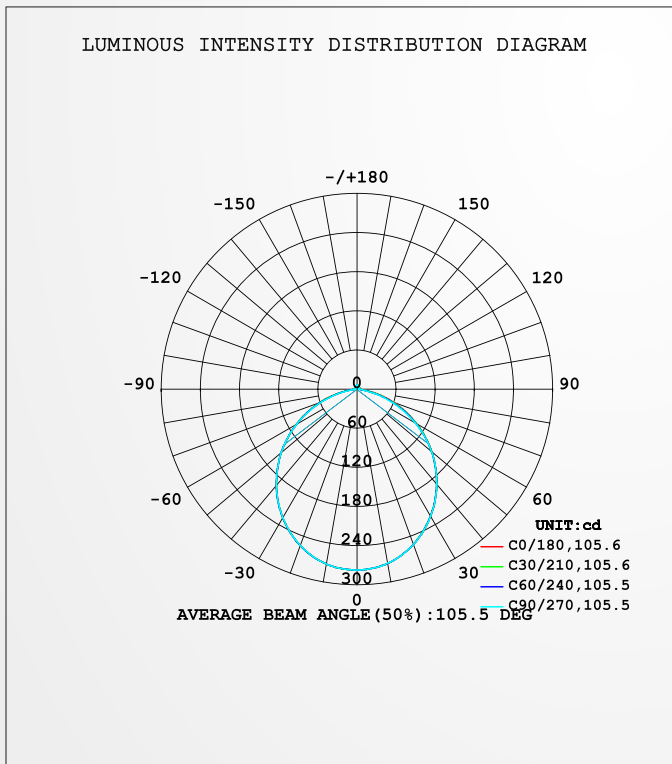

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: JACK  
Test Date: 2019-05-09

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 65.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR  
FACEBOOK PAGE +

NEXTLITE PRODUCTS




# 10W

## AAI FIGURE

NAME: EROS LED DOWNLIGHT	TYPE: LED	WEIGHT:
SPEC.: 10W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

Flux out: 512.5 lm

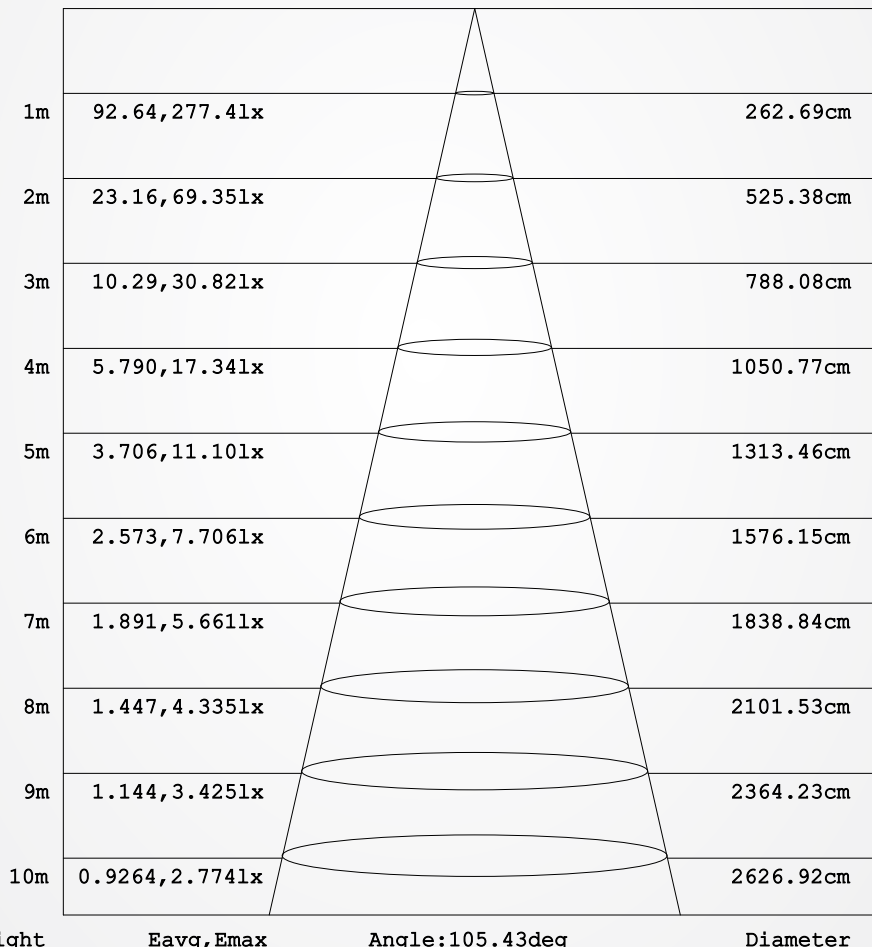

Height                      Eavg, Emax                      Angle: 105.43deg                      Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: JACK  
Test Date: 2019-05-09

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 65.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR  
FACEBOOK PAGE +

NEXLITE PRODUCTS