



PL13-R Video



PL13-R

LED PANEL LIGHT

30W

40W

specification

PRODUCT NAME :	LED PANEL LIGHT
MODEL NO. :	PL13-R 30W / PL13-R 40W
SPECIFICATION :	AC200-240V, 50-60Hz ; 30W / 40W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
COLOR :	White
LIGHT SOURCE :	2835 SMD Chip
LUMEN :	100LM/W
BEAM ANGLE :	120°
PRODUCT SIZE :	1200*300*20mm
IP :	IP20
APPLICATION :	Home, Shop, Hotel, Office..etc.
WARRANTY :	3 years
STANDARD :	CE

Color Temperature:

6500K / 4000K / 3000K





LUMINAIRE PHOTOMETRIC TEST REPORT



NAME: LED PANEL LIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	PL13-R 30W	Imax (cd)	824.5	S/MH (C0/180)	1.26
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2716.5	η UP, DN (C0-180)	1.8, 48.4
NOMINAL FLUX (lm)	2716.55	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.5, 48.3
LAMPS INSIDE	1	η up (%)	3.3	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	219.5	η down (%)	96.7	CIBSE SHR MAX	1.35

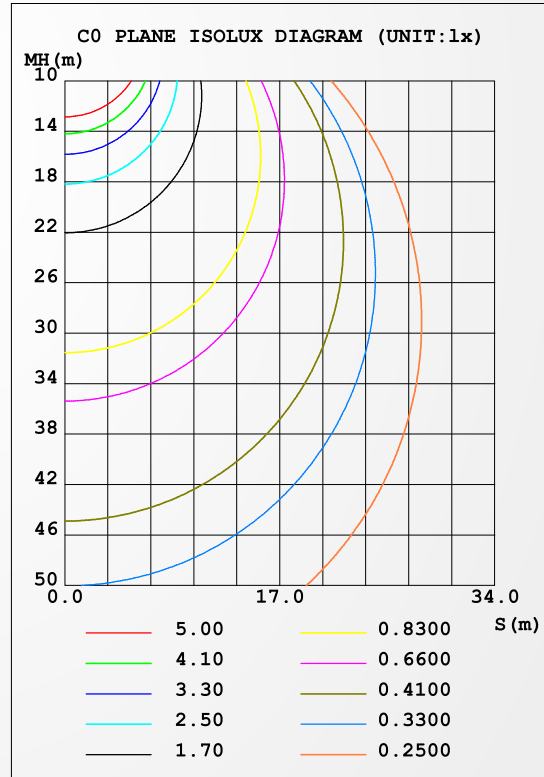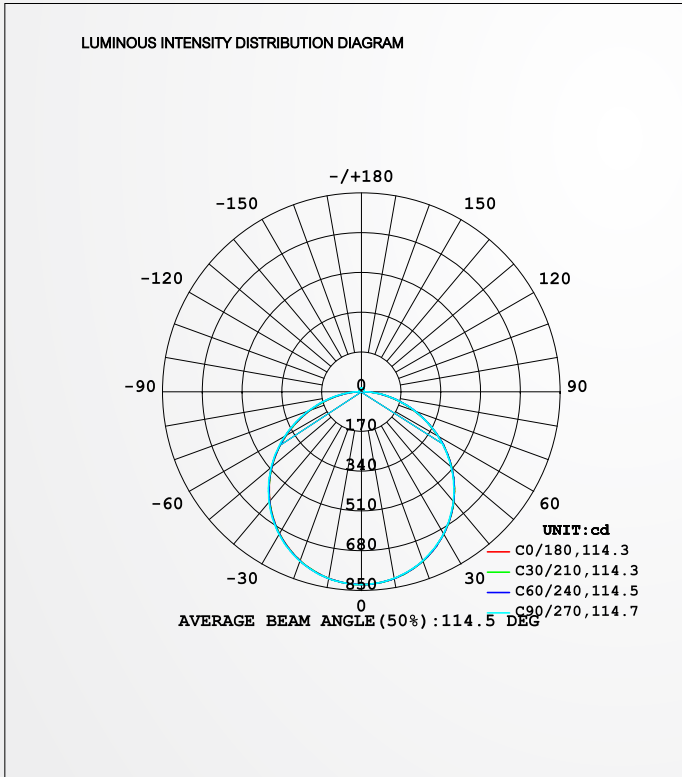

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: JACK
Test Date: 2019-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 65.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR FACEBOOK PAGE +



NEXTLITE PRODUCTS

LUMINAIRE PHOTOMETRIC TEST REPORT



NAME: LED PANEL LIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	P113-R 40W	Imax (cd)	1103	S/MH (C0/180)	1.26
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	3817.2	η UP, DN (C0-180)	1.8, 48.2
NOMINAL FLUX (lm)	3817.21	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.7, 48.4
LAMPS INSIDE	1	η up (%)	3.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	219.5	η down (%)	96.6	CIBSE SHR MAX	1.35

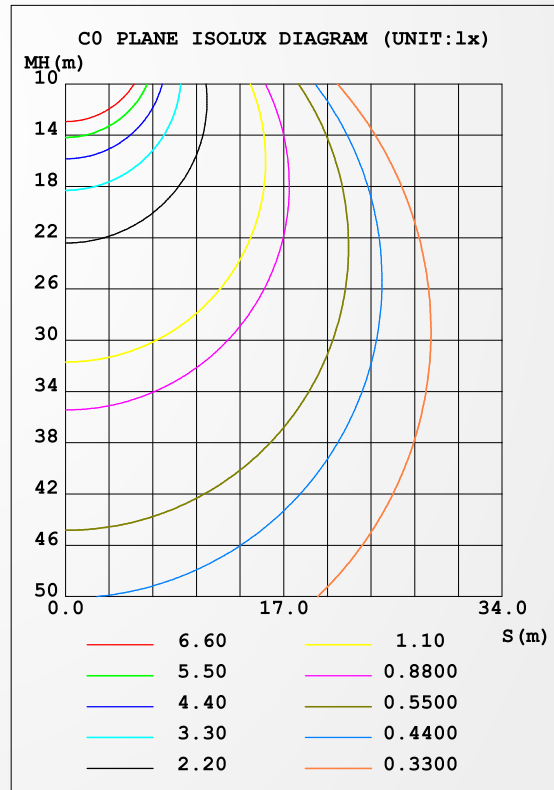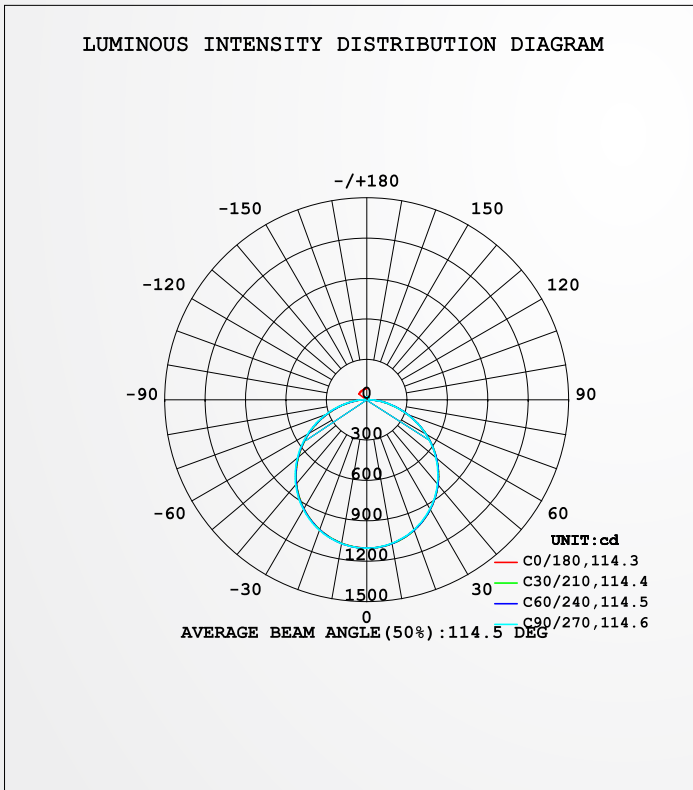

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: JACK
Test Date: 2019-06-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 65.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS