

3 YEARS
WARRANTY



UFO Video



LED PANEL
UFO

6W

12W

18W

24W

specification

PRODUCT NAME :	UFO Panel Light
MODEL NO. :	UFO 6W/12W/18W/24W
SPECIFICATION :	AC200-240V, 50-60Hz, 6W/12W/18W/24W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
COLOR :	White
LIGHT SOURCE :	SMD Chip
LUMEN :	110 LM/W
BEAM ANGLE :	120°
PRODUCT SIZE :	120*35mm/170*40mm/220*40mm/300*40mm
IP :	IP20
APPLICATION :	Home, Shop, Hotel..etc.
WARRANTY :	3 years
STANDARD :	CE

Color Temperature:

6500K , 4000K , 3000K Changeable Color





12W

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: UFO PANEL LIGHT	TYPE: SMD	WEIGHT:
SPEC.: 12W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 12.6	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 86.09 lm/W
MODEL	UFO	I _{max} (cd)	336.9	S/MH (C0/180)	1.23	
NOMINAL POWER (W)	12W	LOR (%)	100.0	S/MH (C90/270)	1.23	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1003.9	η UP, DN (C0-180)	1.9, 49.6	
NOMINAL FLUX (lm)	1003.94	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.5, 47.0	
LAMPS INSIDE	1	η up (%)	3.4	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	220	η down (%)	96.6	CIBSE SHR MAX	1.35	

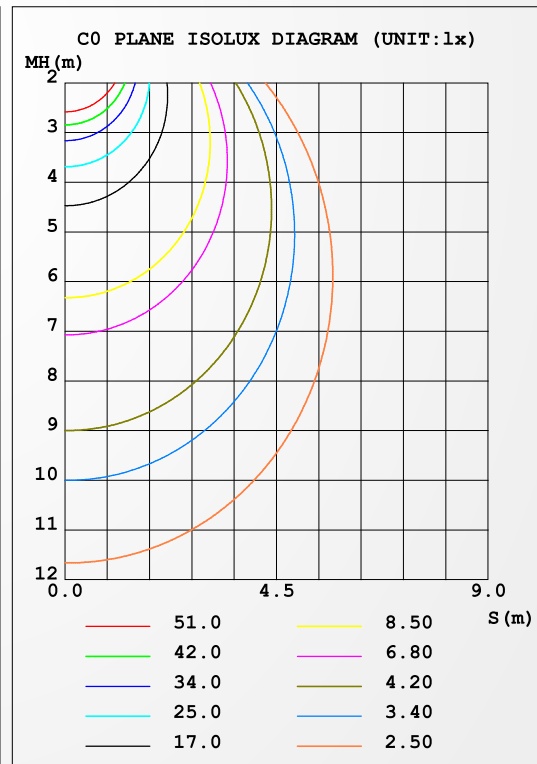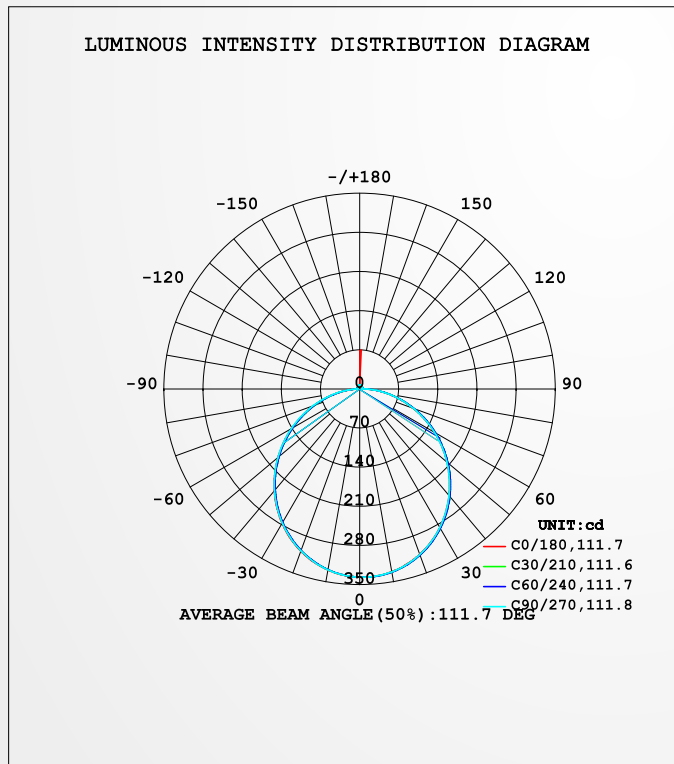

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2020-08-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 70.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




12W

AAI FIGURE

NAME: UFO PANEL LIGHT	TYPE: SMD	WEIGHT:
SPEC.: 12W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 12.6	Shielding Angle:

Flux out: 691.1 lm

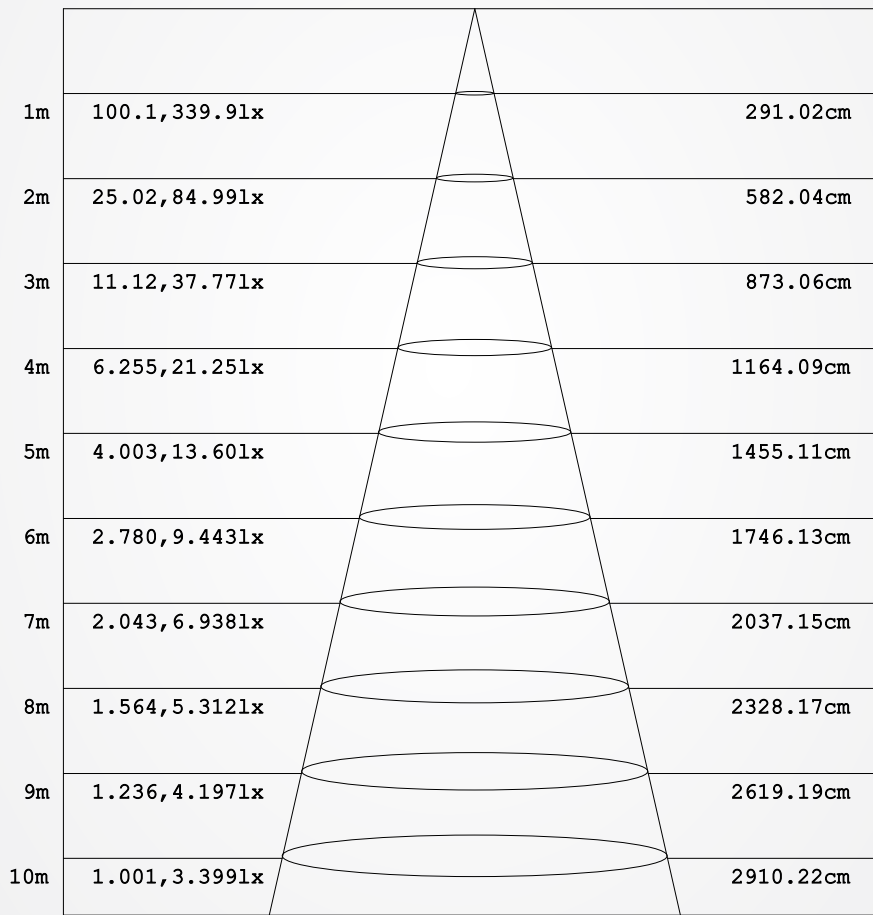

Height Eavg, Emax Angle: 111.00deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2020-08-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 70.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS




18W

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: UFO PANEL LIGHT	TYPE: SMD	WEIGHT:
SPEC.: 18W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 17.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	UFO	Imax (cd)	407.1	S/MH (C0/180)	1.25
NOMINAL POWER (W)	18W	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1536.8	η UP, DN (C0-180)	1.9, 48.4
NOMINAL FLUX (lm)	1536.84	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.5, 48.2
LAMPS INSIDE	1	η up (%)	3.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	96.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

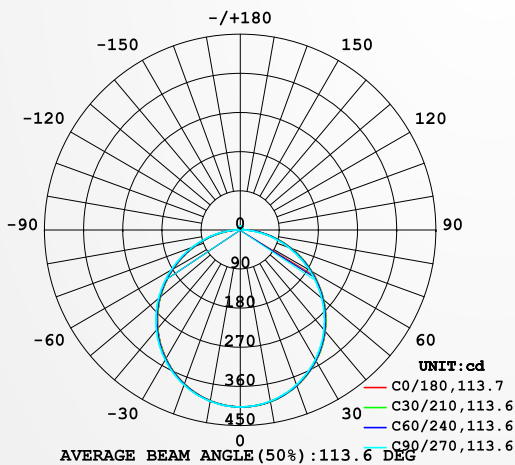

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

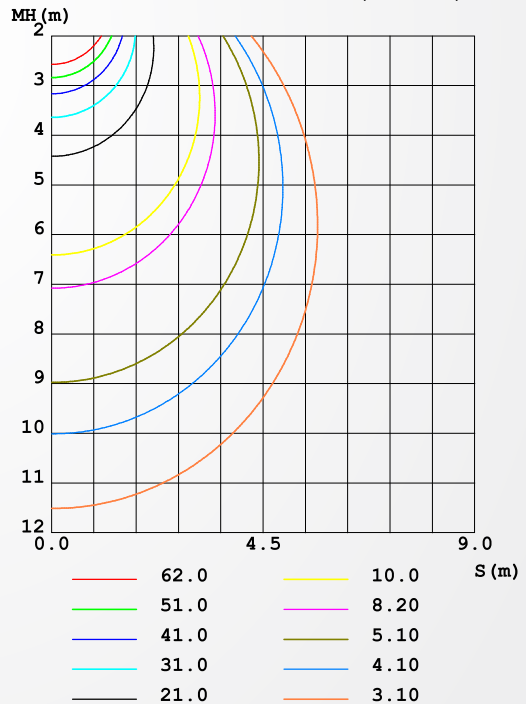

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2020-08-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 70.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




18W

AAI FIGURE

NAME: UFO PANEL LIGHT	TYPE: SMD	WEIGHT:
SPEC.: 18W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 17.5	Shielding Angle:

Flux out: 858.2 lm

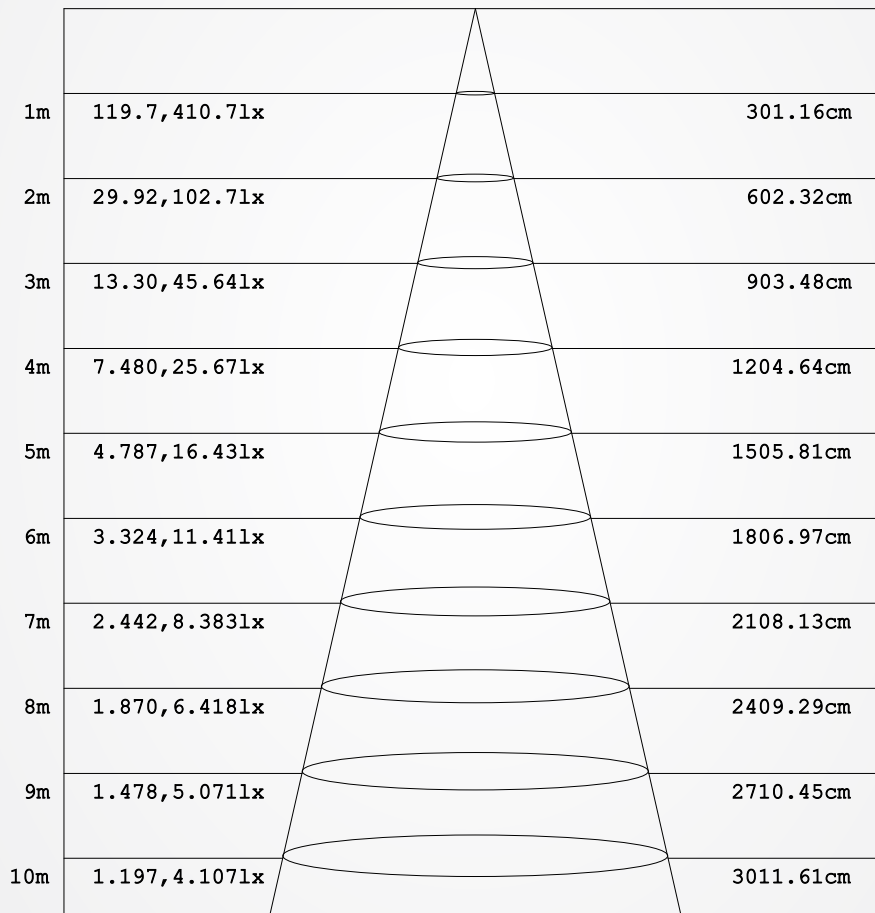

Height Eavg, Emax Angle: 112.82deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2020-08-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 70.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




24W

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: UFO PANEL LIGHT	TYPE: SMD	WEIGHT:
SPEC.: 24W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 25	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	UFO	Imax (cd)	585.9	S/MH (C0/180)	1.25
NOMINAL POWER (W)	24W	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1801.2	η UP, DN (C0-180)	1.9, 48.9
NOMINAL FLUX (lm)	1801.22	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.5, 47.7
LAMPS INSIDE	1	η up (%)	3.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	96.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

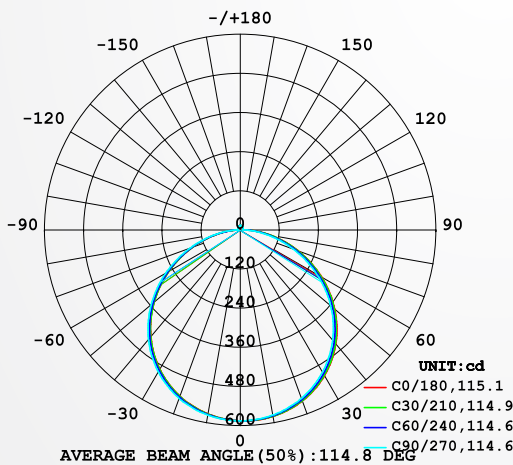

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

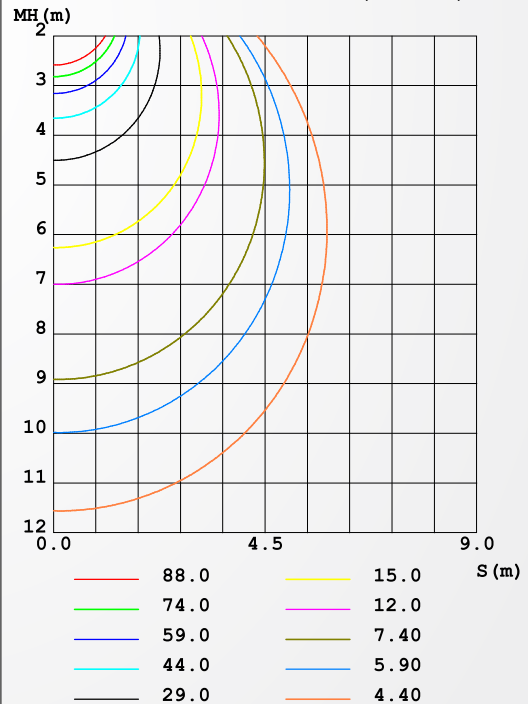

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2020-08-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 70.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




24W

AAI FIGURE

NAME: UFO PANEL LIGHT	TYPE: SMD	WEIGHT:
SPEC.: 24W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 25	Shielding Angle:

Flux out: 1282 lm

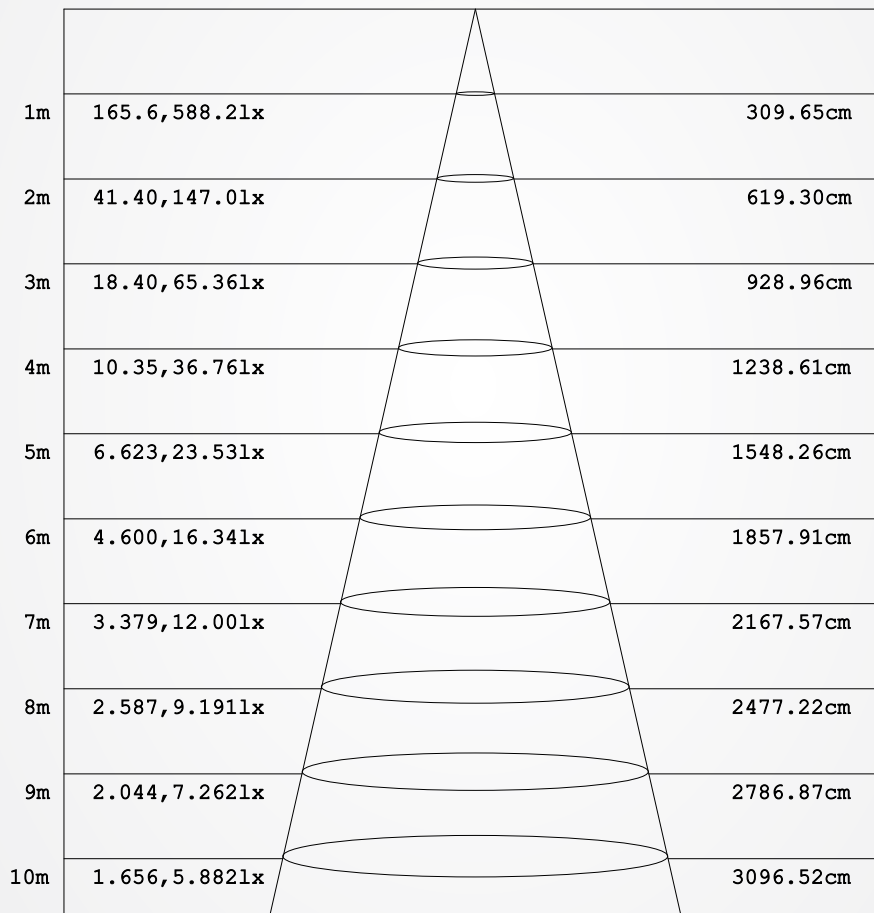

Height Eavg, Emax Angle: 114.28deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2020-08-06

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 70.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS