



IP65

VIDEO



LED BULKHEAD

20W

specification

Product Name :	LED BULKHEAD
Model No. :	NX-MPL18-2906J-20W
Specification :	AC220-240V, 50/60Hz, 150mA, 20W
Working Temp :	-10~40(°C)
Power Factor :	0.5
CRI(ra) :	80
Body Color :	Black
Light Source :	SMD Chip
Lumen :	60-70LM/W
Life Time :	25000 hrs
Beam Angle :	100°
Product Size :	262*130*128mm
IP :	IP65
Application :	Home, Shop, Hotel...etc
Warranty :	2 years
Standard :	CE

Color Temperature:

3000K / 4000K / 6500K







20W

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.27V I:0.151A P:20.41W PF:0.5876 Freq:49.99Hz Lamp Flux:1663.41x1 lm		
NAME: LED BULKHEAD	TYPE:LED	WEIGHT:
SPEC.: NX-MPL18-2906J-20W-30K	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 59.30 lm/W
MODEL	NX-MPL18-2906J-20W-30K	Imax (cd)	424.7	S/MH (C0/180)	1.24	
NOMINAL POWER (W)	20	LOR (%)	72.8	S/MH (C90/270)	0.60	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1210.3	η UP, DN (C0-180)	11.9, 48.2	
NOMINAL FLUX (lm)	1663.41	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	2.4, 10.3	
LAMPS INSIDE	1	η up (%)	14.3	CIBSE SHR NOM	1.50	
TEST VOLTAGE (V)	230	η down (%)	58.5	CIBSE SHR MAX	1.55	

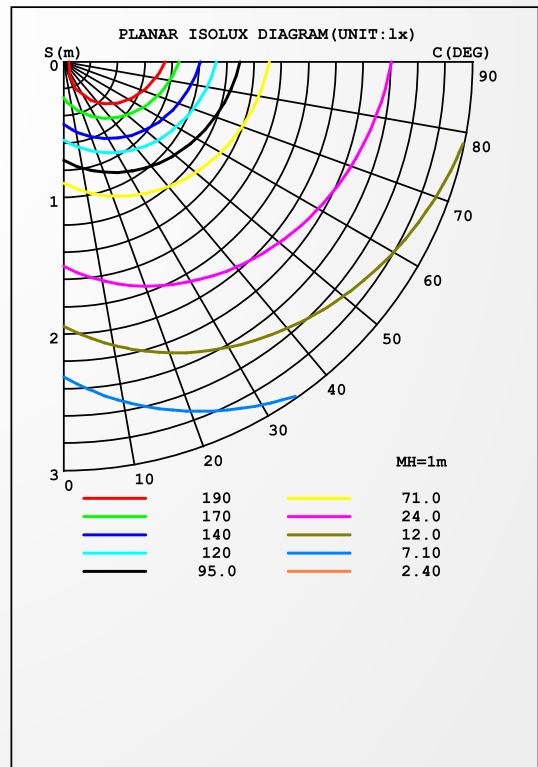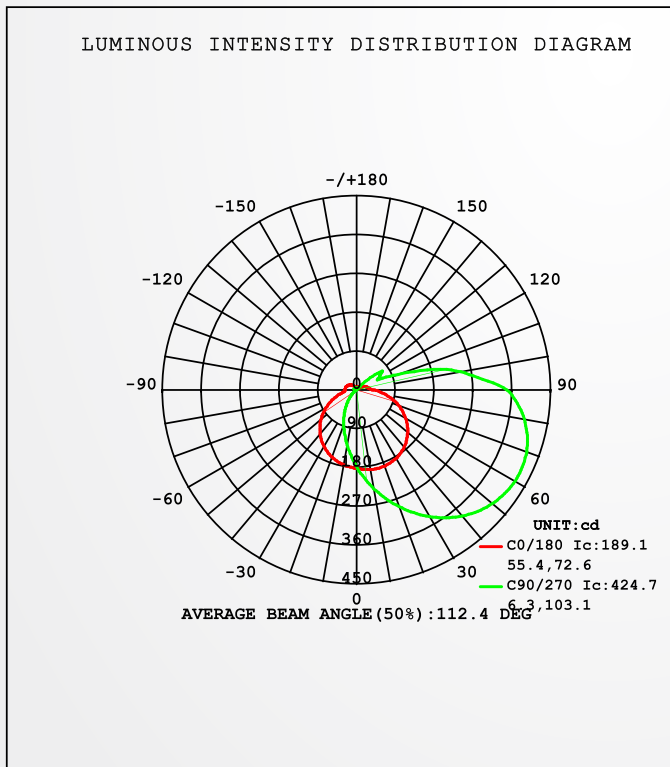

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NEXLEDS
Test Date: 2022-04-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity: 60%
Test Distance: 7.630m [K=1.0000]
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS




20W

AAI FIGURE

Test:U:230.27V I:0.151A P:20.41W PF:0.5876 Freq:49.99Hz Lamp Flux:1663.41x1 lm		
NAME: LED BULKHEAD	TYPE:LED	WEIGHT:
SPEC.: NX-MPL18-2906J-20W-30K	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

Flux out:388.9 lm

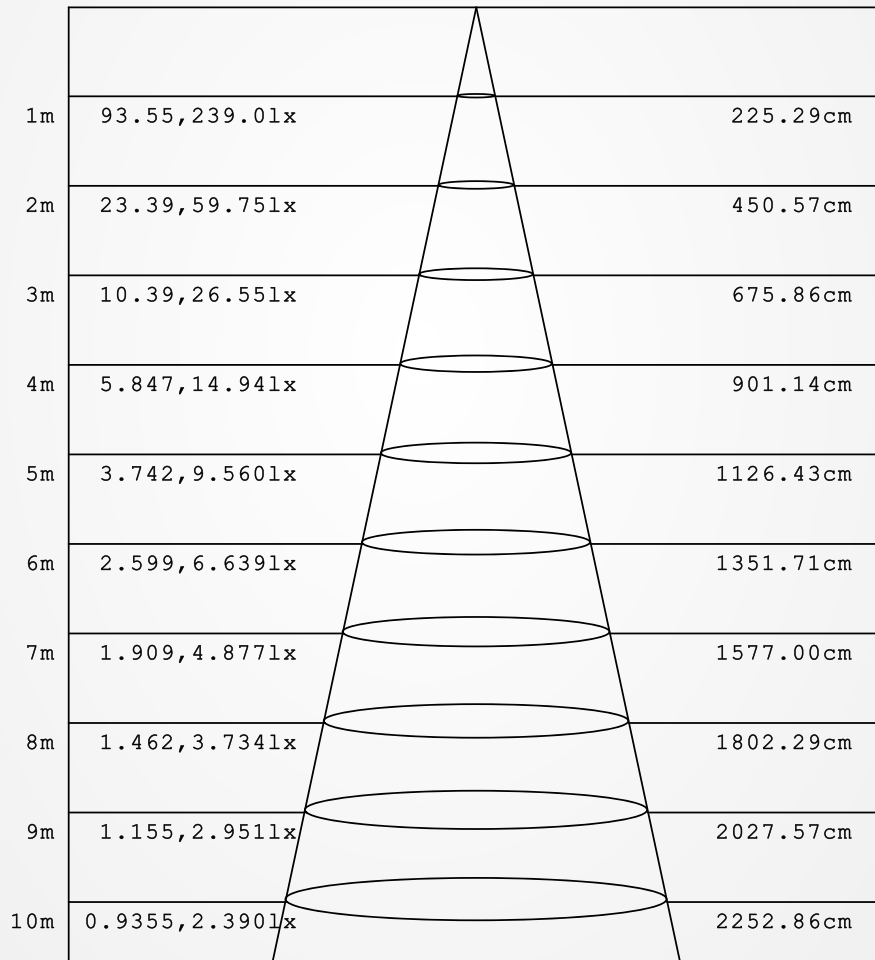

Height Eavg,Emax Angle:96.81deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators: NEXLEDS
Test Date:2022-04-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:60%
Test Distance:7.630m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS