


3 CCT
Changeable



Extended function

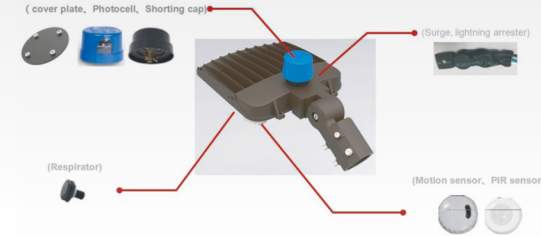

Product Features:

1. High luminous efficiency and low UGR
2. Simple and stylish appearance
3. Excellent heating dissipation
4. -40C~45C Working Temperature
5. 3CCT and Power selectable



LED Shoebox Light

specification

PRODUCT NAME :	100W-150W-200W 3CCT LED Shoebox Light
MODEL NO. :	NX-ARS7-200/150/100W-H-TCP
SPECIFICATION :	AC 100-277V, 50/60 Hz; 2200mA
WORKING TEMP :	-40~+45(°C)
POWER FACTOR :	>0.9
CRI(RA) :	>80
COLOR :	Brown Color
LIGHT SOURCE :	SMD 2835
LUMEN :	165 lm /M
LIFE TIME :	50000 hrs
BEAM ANGLE :	Type III M
PRODUCT SIZE :	22.67x12.4x3.27 inch
COLOR TEMP :	3000K-4000K-5000K Changeable
IP :	IP65
APPLICATION :	Home, Shop, Hotel, Building ...etc
WARRANTY :	5 years
STANDARD :	UL

Color Temperature:

3000K-4000K-5000K Changeable





LUMINAIRE PHOTOMETRIC TEST REPORT



Test:U:119.68V I:1.6896A P:200.74W PF:0.9927 Freq:50.01Hz UTHDi:0.81% ITHDi:8.49% KDisp:0 Lamp Flux:33196.9x1 lm		
NAME: NEXTLITE F.Z.E	TYPE: NX-ARS7-200W-H (XX) -Y	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 280*280	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 165.38 lm/W
MODEL	NX-ARS7-200W-H (XX) -Y	I _{max} (cd)	15529	S/MH (C0/180)	2.22	
NOMINAL POWER (W)	100	LOR (%)	100.0	S/MH (C90/270)	0.53	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	33197	η UP, DN (C0-180)	1.4, 70.2	
NOMINAL FLUX (lm)	33196.9	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.3, 27.0	
LAMPS INSIDE	1	η up (%)	2.8	CIBSE SHR NOM	1.50	
TEST VOLTAGE (V)	120	η down (%)	97.2	CIBSE SHR MAX	1.50	

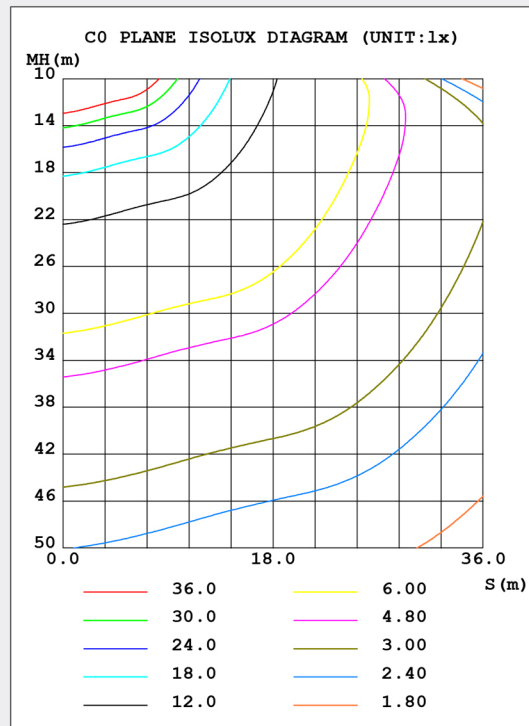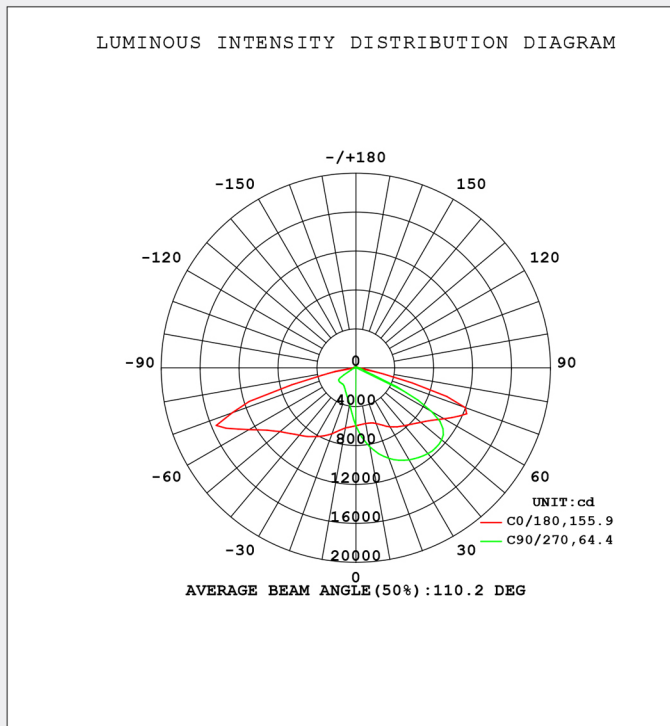

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: DAMIN
 Test Date: 2022-05-26

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.458
 Humidity: 65.0%
 Test Distance: 6.030m [K=1.0000]
 Remarks:



JOIN US ON OUR
FACEBOOK PAGE +


NEXTLITE PRODUCTS

AAI Figure



Test:U:119.68V I:1.6896A P:200.74W PF:0.9927 Freq:50.01Hz		
UTHDi:0.81% ITHDi:8.49% KDisp:0 Lamp Flux:33196.9x1 lm		
NAME: NEXTLITE F.Z.E	TYPE: NX-ARS7-200W-H (XX) -Y	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 280*280	Shielding Angle:

Flux out:6433 lm

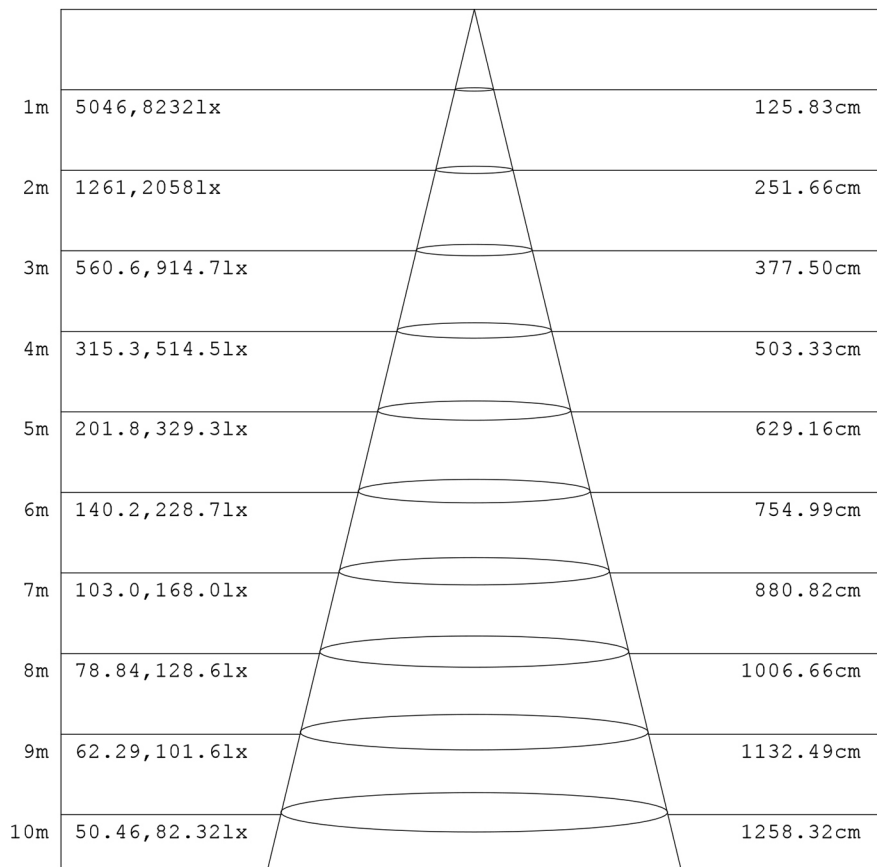

Height Eavg, Emax Angle:64.35deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3 °C
Operators:DAMIN
Test Date:2022-05-26

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000B_v1 SYSTEM V2.00.458
Humidity:65.0%
Test Distance:6.030m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS