

3 YEARS
WARRANTY



VIDEO



WL81
LED WALL LIGHT

12W

20W

specification

PRODUCT NAME :	LED WALL LIGHT
MODEL NO. :	WL81 12W / WL81 20W
SPECIFICATION :	AC220-240V,50/60Hz; 12W / 20W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
COLOR :	Black / White
LIGHT SOURCE :	SMD
LUMEN :	100 LM/W
BEAM ANGLE :	120°
PRODUCT SIZE :	152*52*190mm
IP :	IP65
APPLICATION :	Home, Shop, Hotel..etc.
WARRANTY :	3 years
STANDARD :	CE

Color Temperature:

6500 / 4000K / 3000K





20W

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: WL81 LED WALL LIGHT	TYPE:	WEIGHT:
SPEC.: 20W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 183X143mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	WL81 20W	Imax (cd)	605.3	S/MH (C0/180)	1.30
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2168.6	η UP, DN (C0-180)	3.4, 46.4
NOMINAL FLUX (lm)	2168.63	CIE CLASS	DIRECT	η UP, DN (C180-360)	3.1, 47.1
LAMPS INSIDE	1	η up (%)	6.5	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	220	η down (%)	93.5	CIBSE SHR MAX	1.50

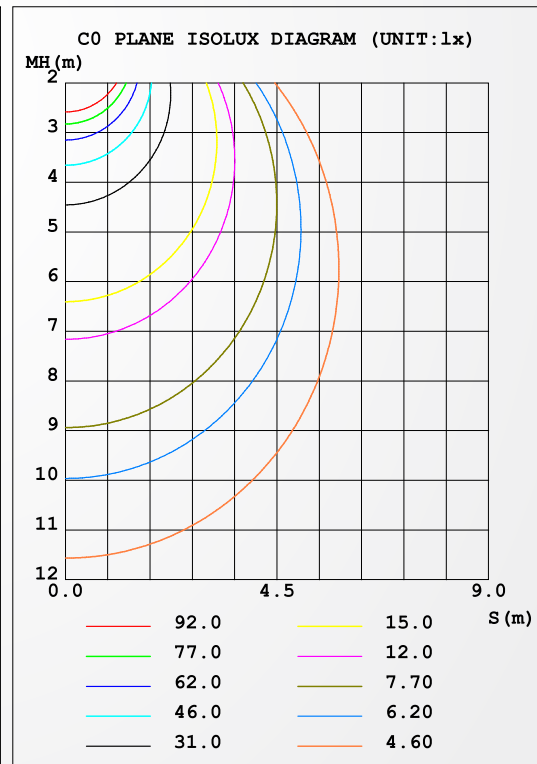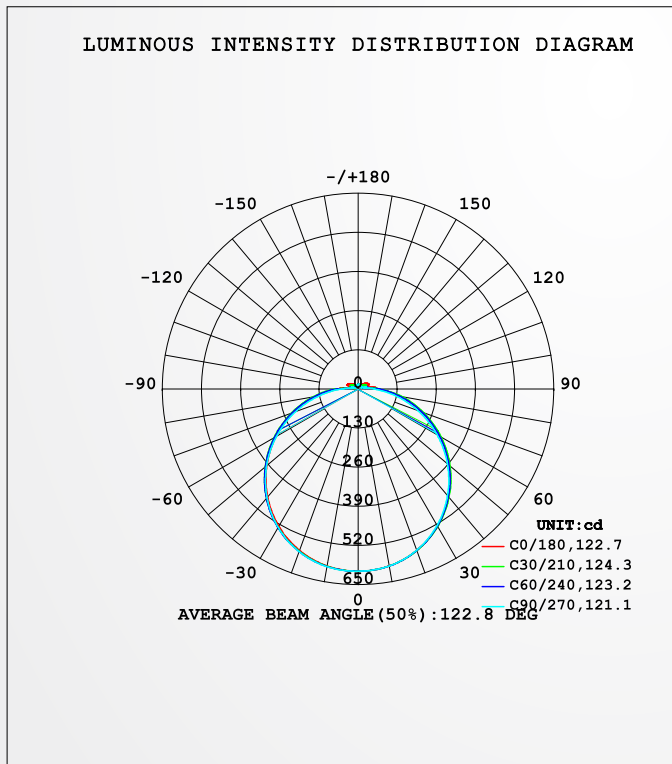

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2022-03-24

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 63.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




20W

AAI FIGURE

NAME: WL81 LED WALL LIGHT	TYPE:	WEIGHT:
SPEC.: 20W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 183X143mm	Shielding Angle:

Flux out:1448 lm

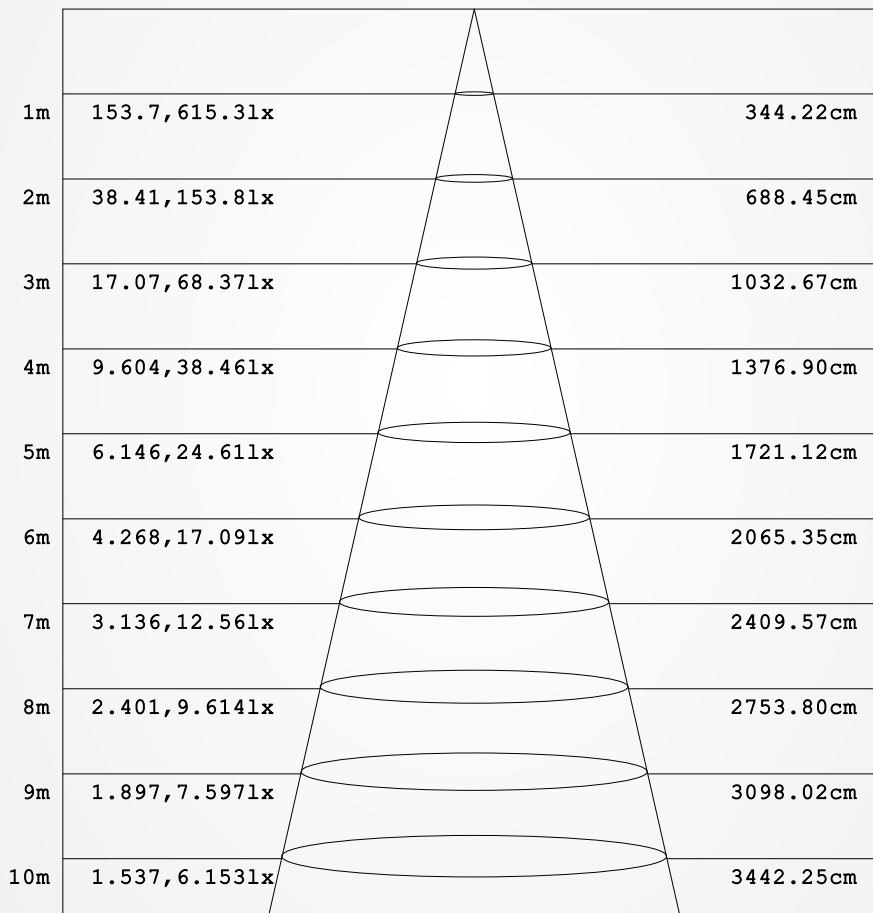

Height Eavg, Emax Angle:119.69deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2022-03-24

Range: 0 - 180DEG
 Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 63.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS