

**3 YEARS**  
WARRANTY

**3 CCT**  
**CHANGEABLE**

Flip switch to change 3 CCT

6500K 4000K 3000K



**Video**



**DL32-3CCT**  
LED DOWNLIGHT

**specification**

PRODUCT NAME :	LED DOWNLIGHT
MODEL NO. :	DL32-3CCT 26W/20W/10W/7W/5W
SPECIFICATION :	AC220-240V, 50-60Hz, 26W/20W/10W/7W/5W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
COLOR :	White
LIGHT SOURCE :	SMD
LUMEN :	100 LM/W
BEAM ANGLE :	120°
PRODUCT SIZE :	230*30mm/185*30mm/120*30mm/110*30mm/100*30mm
CUT OUT :	190mm/145mm/95mm/80mm/75mm
IP :	IP20
APPLICATION :	Home, Shop, Hotel..etc.
WARRANTY :	3 years
STANDARD :	CE

**Color Temperature:**

**6500-4000K-3000K (3CCT) Changeable**





# 10W

## LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: DL32-3CCT LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.: 10W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 8	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 77.12 lm/W
MODEL	DL32-3CCT 20W	I <sub>max</sub> (cd)	294.7	S/MH (C0/180)	1.23	
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.23	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	804.38	η UP, DN (C0-180)	1.9, 47.8	
NOMINAL FLUX (lm)	804.377	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.5, 48.8	
LAMPS INSIDE	1	η up (%)	3.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	220	η down (%)	96.7	CIBSE SHR MAX	1.35	

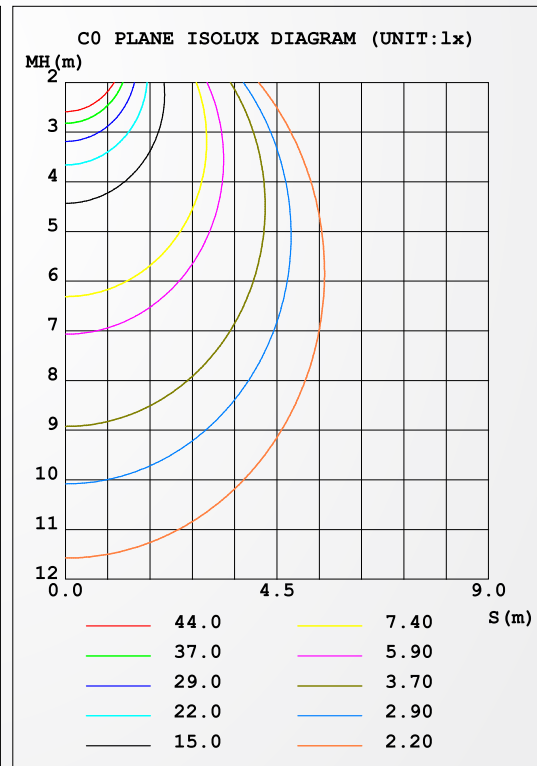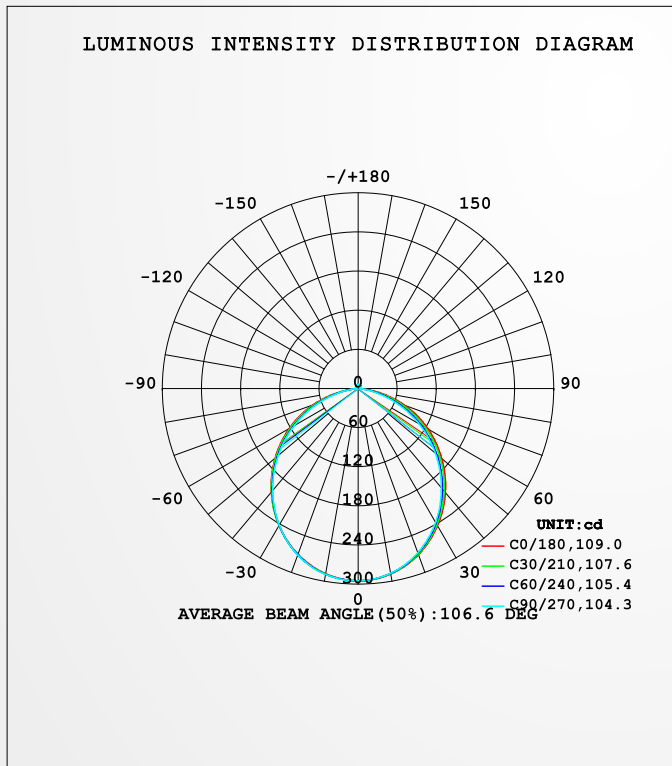

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: MEDIUM  
Temperature: 28DEG  
Operators: JACK  
Test Date: 2022-01-05

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 63.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS




# 10W

## AAI FIGURE

NAME: DL32-3CCT LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.: 10W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 8	Shielding Angle:

Flux out: 540.4 lm

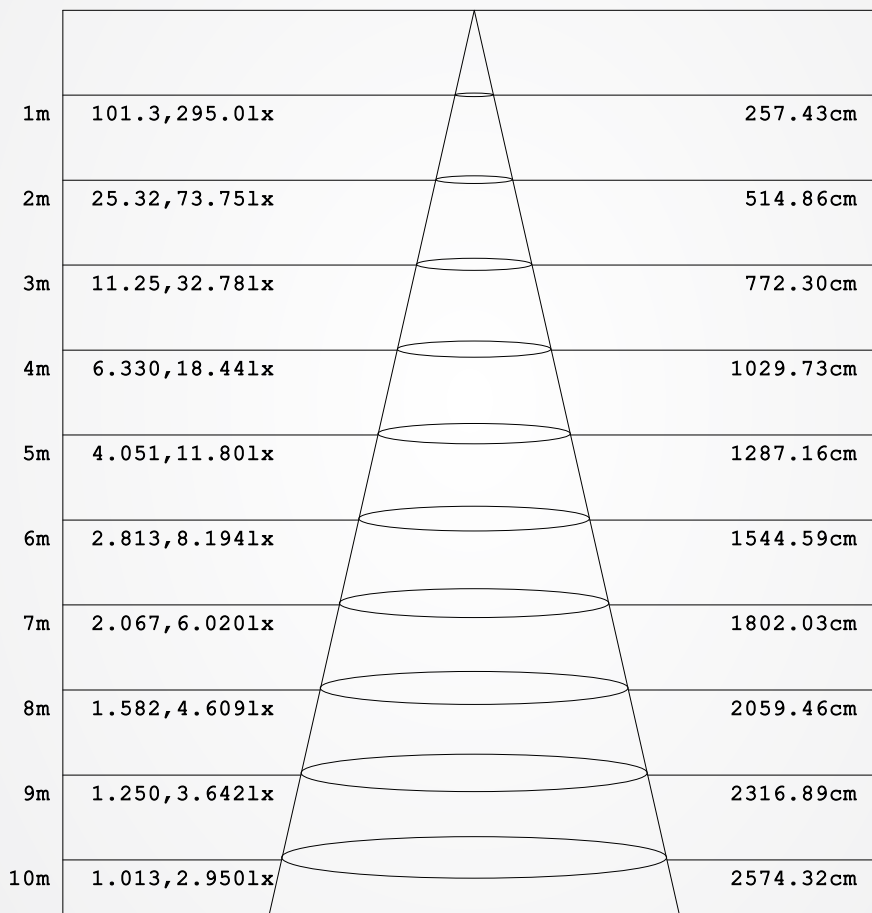

Height                      Eavg, Emax                      Angle: 104.31deg                      Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: MEDIUM  
Temperature: 28DEG  
Operators: JACK  
Test Date: 2022-01-05

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 63.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR  
FACEBOOK PAGE +

NEXTLITE PRODUCTS





# 20W

## LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: DL32-3CCT LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.: 20W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:13	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 91.68 lm/W
MODEL	DL32-3CCT 20W	Imax (cd)	601.6	S/MH (C0/180)	1.26	
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1768.8	η UP, DN (C0-180)	1.9, 48.1	
NOMINAL FLUX (lm)	1768.83	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.5, 48.4	
LAMPS INSIDE	1	η up (%)	3.4	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	220	η down (%)	96.6	CIBSE SHR MAX	1.35	

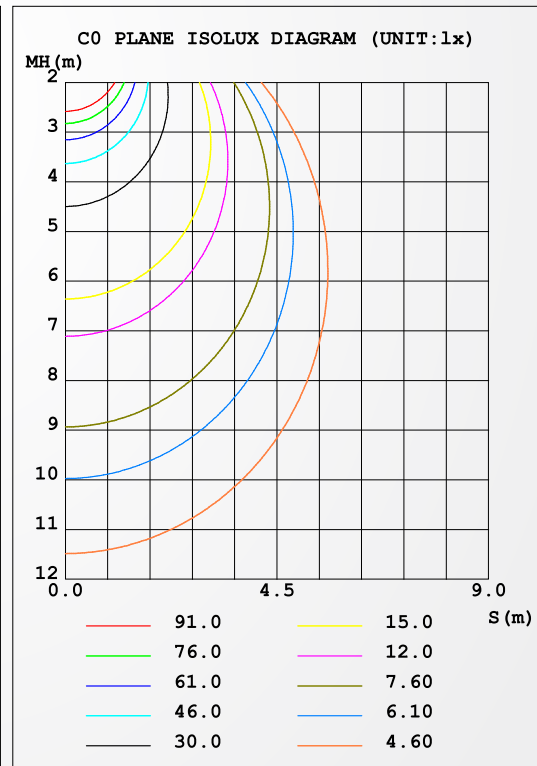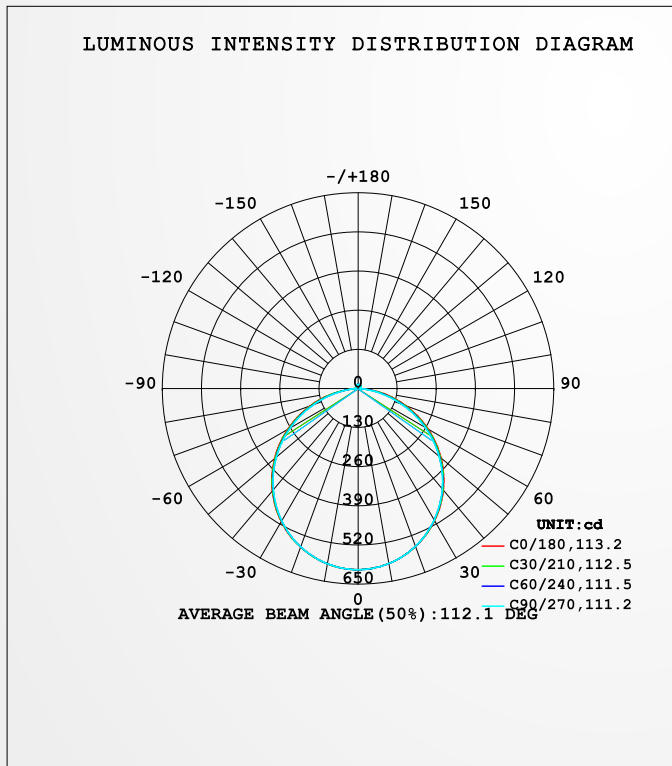

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: MEDIUM  
Temperature: 28DEG  
Operators: JACK  
Test Date: 2022-01-05

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 63.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXLITE PRODUCTS






# 20W

## AAI FIGURE

NAME: DL32-3CCT LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.: 20W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:13	Shielding Angle:

Flux out:1232 lm

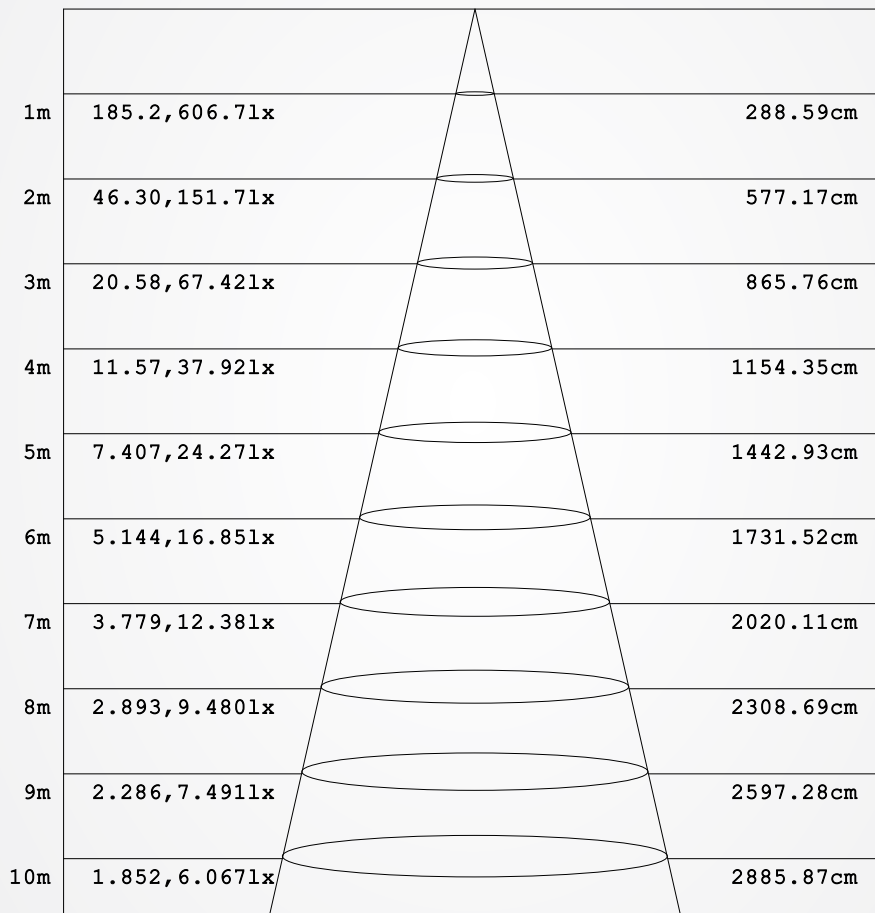

Height                      Eavg, Emax                      Angle:110.55deg                      Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: MEDIUM  
Temperature:28DEG  
Operators:JACK  
Test Date:2022-01-05

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity:63.0%  
Test Distance:11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS