


3 YEARS
WARRANTY



360°
Swivel
ADJUSTABLE
FOCUSING

CLT32 Video

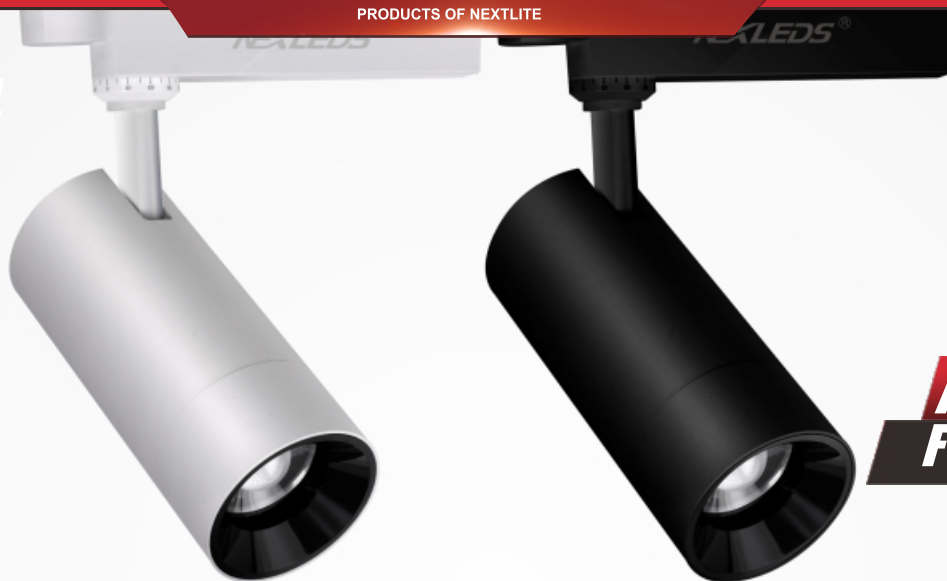

CTL32
TRACK LIGHT

30W

specification

PRODUCT NAME :	LED TRACK LIGHT
MODEL NO. :	CTL32 30W
SPECIFICATION :	AC220-240V, 50-60Hz, 30W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.9
CRI(RA) :	>80
COLOR :	White/Black
LIGHT SOURCE :	COB Chip
LUMEN :	90LM/W
BEAM ANGLE :	10°- 60°
PRODUCT SIZE :	80*180*185mm
IP :	IP20
APPLICATION :	Home, Shop, Hotel, Exhibition hall.. etc
WARRANTY :	3 years
STANDARD :	CE
NET WEIGHT :	779g

Color Temperature:

6500K / 4000K / 3000K




30W

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: CTL32 LED TRACK LIGHT	TYPE: COB	WEIGHT:
SPEC.: 30W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 46mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	CTL32 30W	Imax (cd)	7344	S/MH (C0/180)	0.58
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	0.60
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2963.1	η UP, DN (C0-180)	2.1, 44.6
NOMINAL FLUX (lm)	2963.1	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.1, 52.2
LAMPS INSIDE	1	η up (%)	3.3	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	219.5	η down (%)	96.7	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

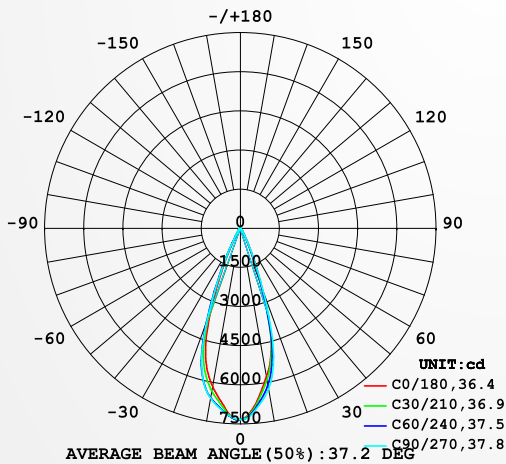

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

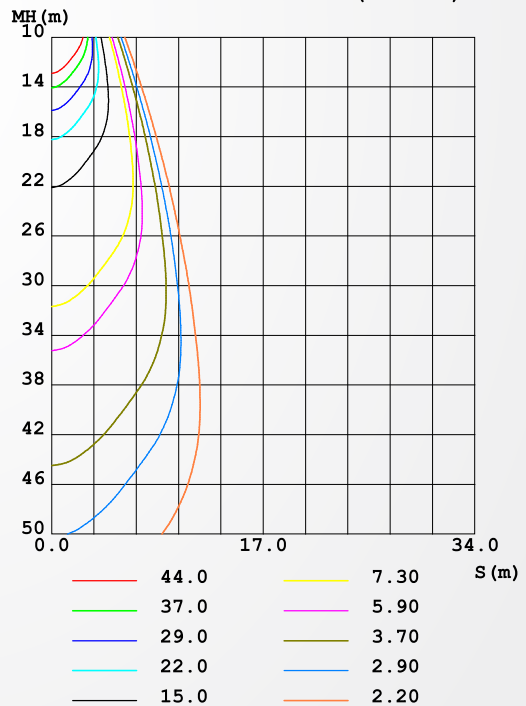

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 18DEG
Operators: JACK
Test Date: 2020-12-24

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 63.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




30W

AAI FIGURE

NAME:CTL32 LED TRACK LIGHT	TYPE:COB	WEIGHT:
SPEC.:30W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 46mm	Shielding Angle:

Flux out:1799 lm

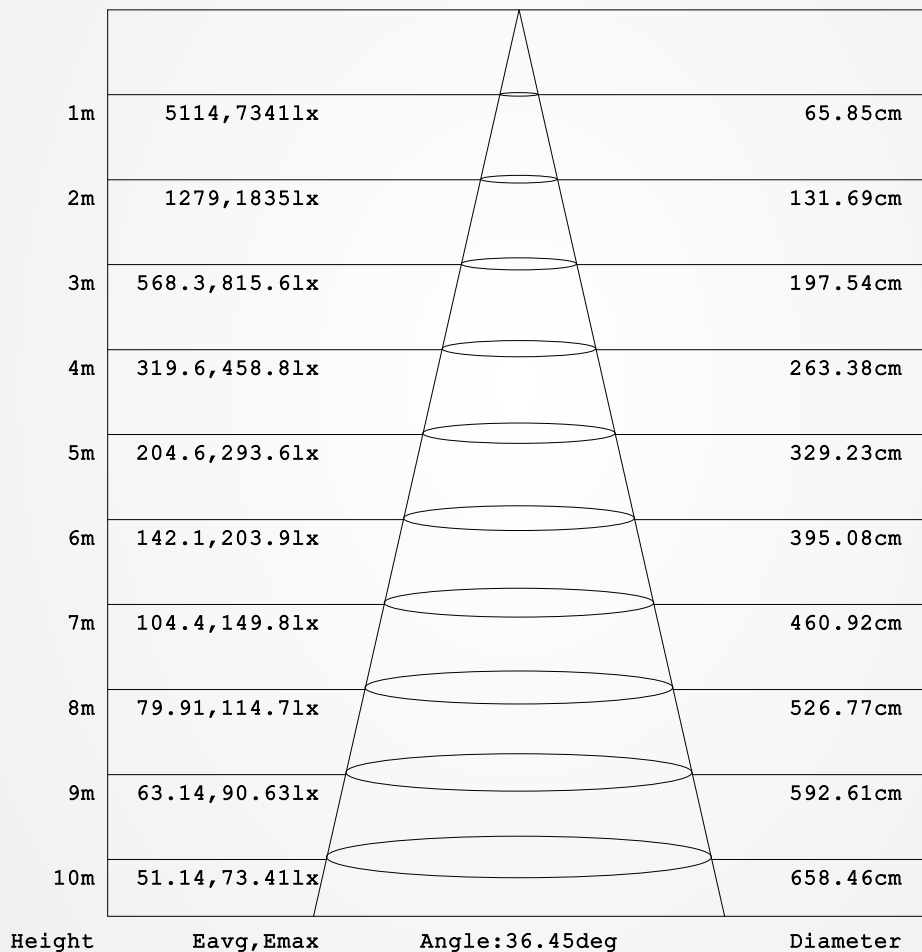

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature:18DEG
Operators:JACK
Test Date:2020-12-24

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity:63.0%
Test Distance:11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS