



3 YEARS
WARRANTY

VIDEO



COB69
Ceiling Downlight

12W

specification

PRODUCT NAME :	LED CEILING DOWNLIGHT
MODEL NO. :	COB69 12W
SPECIFICATION :	AC220-240V, 50-60Hz, 12W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
COLOR :	White+Rose GD/Silver/Black , Black+Rose GD/Silver/Black
LIGHT SOURCE :	COB
LUMEN :	100LM/W
BEAM ANGLE :	30°
PRODUCT SIZE :	94*150mm
IP :	IP20
APPLICATION :	Home, shop, hotel..etc.
WARRANTY :	3 years
STANDARD :	CE

Color Temperature:

6500K-4000K-3000K Changeable




12W

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED CEILING DOWNLIGHT	TYPE:	WEIGHT:0.41KG
SPEC.: COB69 12W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 99.46 lm/W
MODEL	COB69 12W	Imax (cd)	3071	S/MH (C0/180)	0.47	
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	0.48	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1131.8	η UP, DN (C0-180)	2.1, 48.0	
NOMINAL FLUX (lm)	1131.82	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.2, 48.8	
LAMPS INSIDE	1	η up (%)	3.3	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	220	η down (%)	96.7	CIBSE SHR MAX	0.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

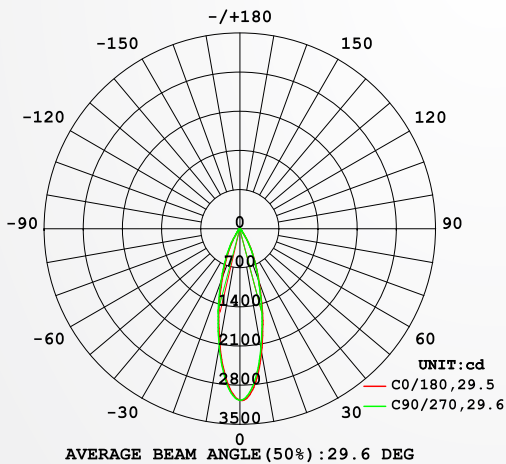

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

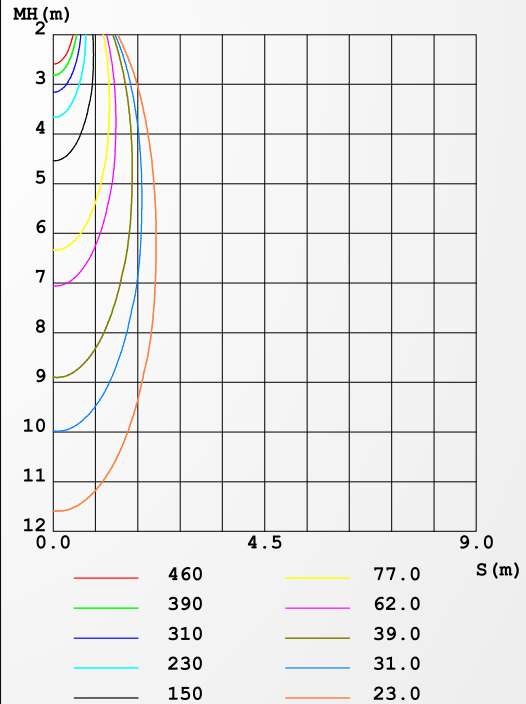

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 28DEG
 Operators: JACK
 Test Date: 08 October 2022

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
 Humidity: 63.0%
 Test Distance: 11.565m [K=1.0000]
 Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS




12W

AAI FIGURE

NAME: LED CEILING DOWNLIGHT	TYPE:	WEIGHT:0.41KG
SPEC.: COB69 12W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

Flux out:459.3 lm

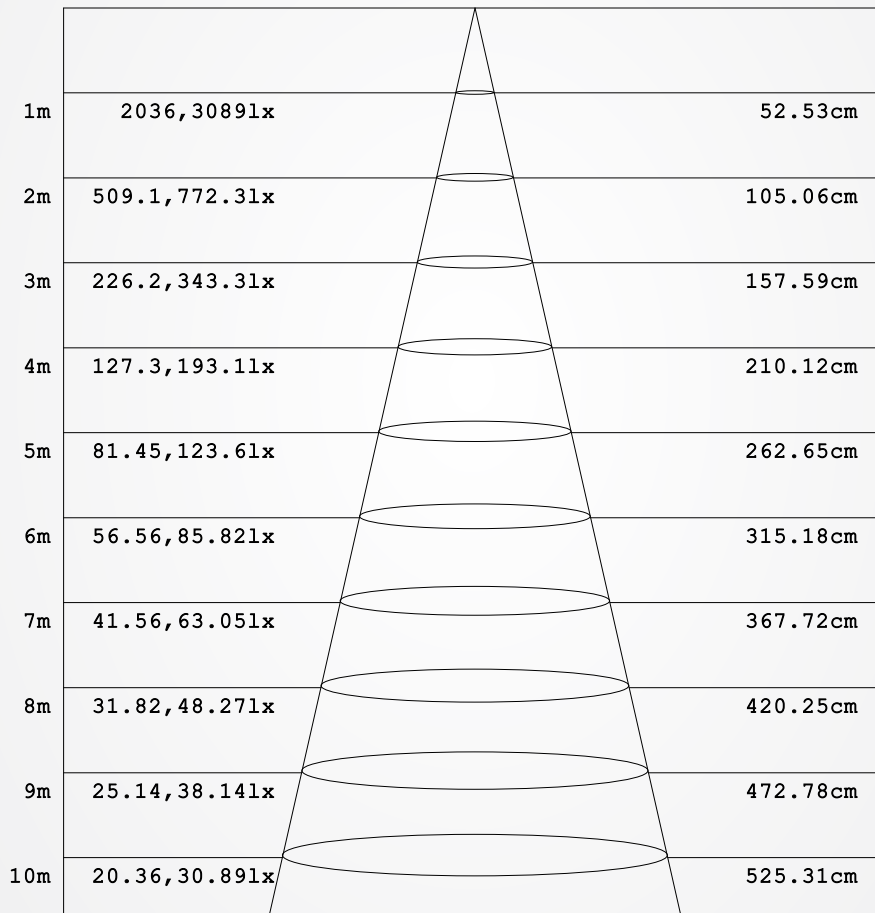

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:28DEG
Operators:JACK
Test Date:08 October 2022

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity:63.0%
Test Distance:11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS